


# Table of Contents

## UFL/ MHF1

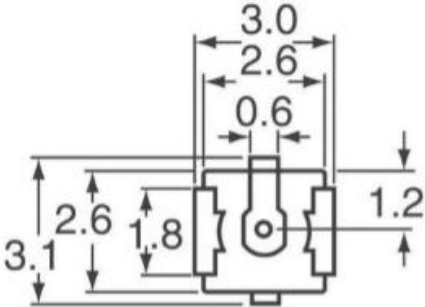

Sl. No.	Model Number	Description	Page No.
1.	LWC-CON-UFL-PCB	RF Connector, UFL Receptacle, SMD	01

Technical Specification		Photograph / Drawing
Model Number	LWC-CON-UFL-PCB	
Frequency (MHz)	0 – 6.0 GHz	
Working Voltage (V)	200 V	
Insulation Resistance	≥ 500 M Ohm	
Contact Resistance	10mA Max	
VSWR	< 1.4	
Mechanical Specification		
Body, Metal Parts	Brass with Gold Plated	
Centre Contact	Phosphor Bronze with Gold Plated	
Insulators	PTFE	
Environmental Specification		Salient Features and Applications
Operational Temperature	-55° to 165° C	<ul style="list-style-type: none"> <li>- High quality.</li> <li>- Low cost.</li> <li>- Interconnects.</li> </ul>
Humidity	5 – 95%	
RoHS Complaint	Yes	